




SEMI AUTOMATIC ROBOT WRAPPER FOR
WRAPPING PALLETS WITH STRETCH FILM



NEOS

MAINTENANCE FREE

TOLL-FREE 1.866.566.2457 | WWW.KEYPAK.CA

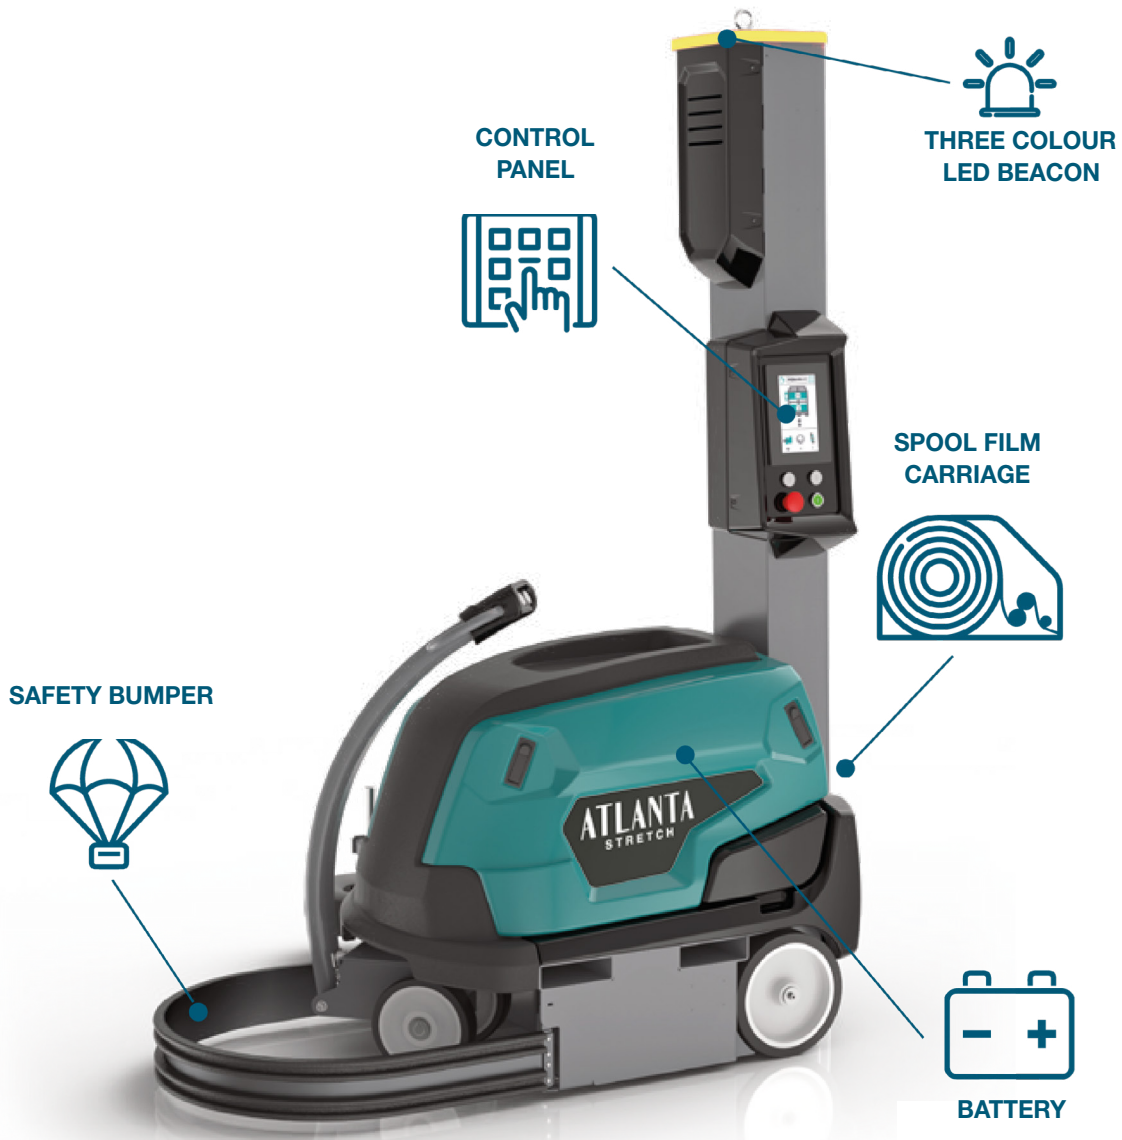


PALLET DIMENSIONS



H mm Mast

- 2200 STD
- 2450 OPT
- 2700 OPT
- 3200 OPT
- 3500 OPT
- 3900 OPT




Neos

L min = 650x400
L Max = ∞



NEW DESIGN, NEW PANEL, NEW OPTIONS

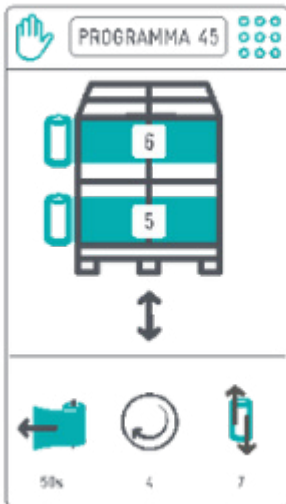

USER FRIENDLY EXPERIENCE

New 7-inch touch panel allows the user to setup and explore ways for the best wrapping result.

TAP TO WRAP

Set and start your wrapping cycle with a few simple commands.



ARYA SYSTEM

Revolutionary patent brings automation within reach without significant investments.

APPLICATIONS





BENEFITS & FEATURES OF THE NEOS MACHINE



ABILITY TO ADJUST TENTION ON LOAD AND PRE STRETCH

Our carriages are standard equipped with the possibility to adjust film tension and pre-stretch during every phase of the wrapping process.




ERGONOMIC SOLUTION FOR THE USER

Equipped with the highest security and safety for the user, allows for a better working environment and higher satisfaction for the user.



EXCHANGEABLE CARRIAGES


The carriage can be upgraded even after to delivery, to acheive lower costs of ownership.



Fork slots on both sides for easy transport.




Manual machine movement:
Steering arm for moving the robot manually inside the workplace.



Polycarbonate, impact proof, safety bumper



Maintenance-free, sealed batteries - no transport restrictions and possibility to recharge the robot in working area

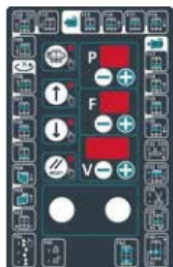

OPERATING PANEL

Easy to use, multifunction programmable control panel. Mytho: [99 Programs]



SPOOL FILM CARRIAGE




EASY FILM CHANGE


Easy reel change, adjustable service height.




Manually adjustable mechanical brake.

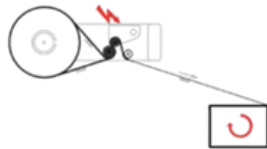

Electromagnetic friction adjustable from control panel.




PRS (Power Roller Stretch): Motorized pre stretch system with 3 drive rollers electronically controlled with interchangeable ratios: 150-200-250%.




PS (Power Stretch): Motorized prestretch system with 3 drive rollers and 2 motors adjustable between 120 to 350% from control panel.



OPTIONALS




Geo Magnetic Compass, allowing the same starting and stopping position when you have to wrap unique pallets.



Automatic film cutting device at cycle end.



Integrated calculation system to indicate the weight of the used stretch film.



Roping system: Reducing the film width to form a rope to ensure more effective load stabilization.



Various wheel dimensions to guarantee a perfect wrapping pattern on pallets with irregular shapes.

WRAPPING PROGRAMS

